



Pro 27" Deep Wall Ventilation Hoods

Along with standard features like heat sentry and dual setting halogen lighting, the pro 27" deep wall hoods provide an additional exclusive feature — heat lamps. Pro 27" deep wall hoods are available in seven widths.



*Model PW482718 shown.
Also shown is model DF484CG dual fuel range.*

FEATURES

- Stainless steel finish.
- Heavy-duty, 16-gauge brushed stainless steel with continually welded seams, hemmed edges and sides.
- Stainless steel enclosed liner.
- Recessed easy-access controls.
- Infinite-speed blower control.
- Heat sentry feature automatically turns unit on when heat is sensed and automatically adjusts blower speed.
- Halogen lighting with two settings.
- Heat lamps — bulbs not included.
- Removable, dishwasher-safe, restaurant-grade stainless steel baffle filters.
- Transition with backdraft damper included.

MODEL OPTIONS

Model	PW302718	PW362718	PW422718	PW482718	PW542718	PW602718	PW662718
Overall Width	30"	36"	42"	48"	54"	60"	66"

BLOWER OPTIONS

CFM	INTERNAL				IN-LINE		REMOTE			
	500	600	900	1200	600	1100	600	900	1200	1500
PW302718		•	•		•	•	•	•	•	•
PW362718 PW422718		•	•			•		•	•	•
PW482718 PW542718			•	•		•		•	•	•
PW602718 PW662718				•		•			•	•

ACCESSORIES

- Internal, in-line and remote blowers (refer to chart above).
- 38" high stainless steel backsplash with or without warming racks.
- 6", 12", 18", 24" and 30" stainless steel duct covers.
- Horizontal discharge kit.



Model PW602718 Pro Wall Hood

Accessories are available through your authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.



Recessed controls.




Heat lamps.



Pro 27" Deep Wall Ventilation Hoods

OVERALL DIMENSIONS

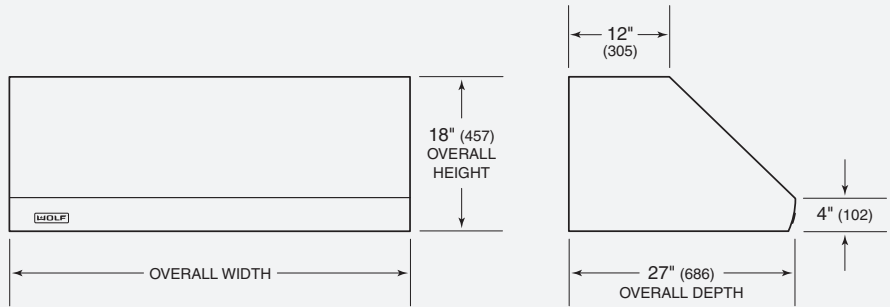


Unit dimensions may vary by $\pm 1/8$ ".

SPECIFICATIONS

Exterior Finish	Stainless Steel
Overall Widths	30", 36", 42", 48", 54", 60" and 66"
Overall Height	18"
Overall Depth	27"
Bottom of Hood to Countertop	30" to 36"
Discharge	Vertical or Horizontal*
Duct Size	10" Round
Electrical Requirements	110/120 V AC 60 Hz, 15 amp dedicated circuit
Shipping Weight	69–128 lbs

*Horizontal discharge applications require a horizontal discharge kit.

INSTALLATION SPECIFICATIONS

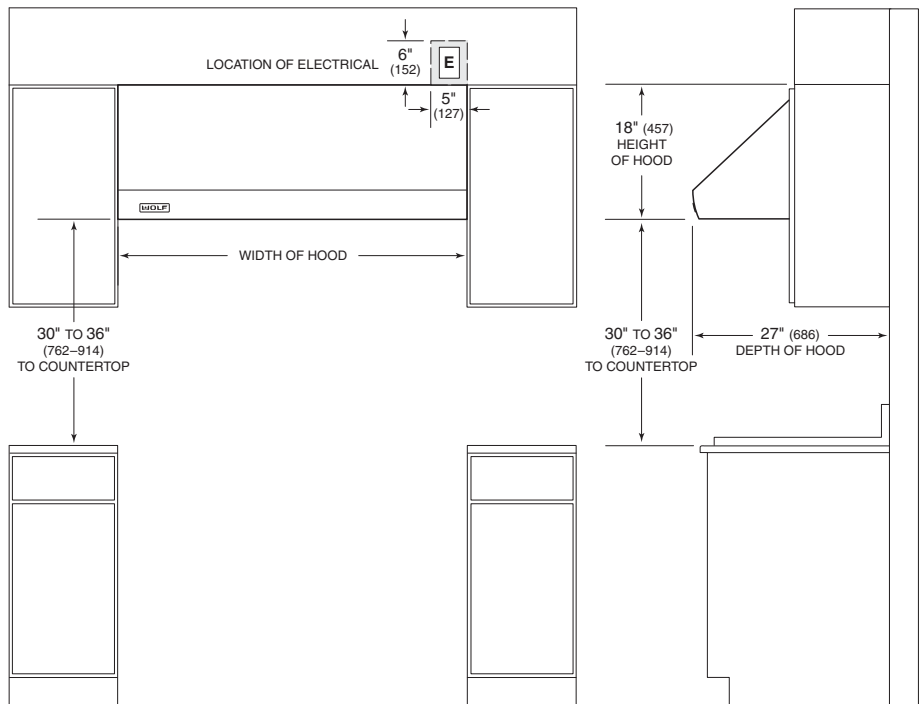

NOTE: Pro 27" (686) deep wall hoods have a vertical discharge. A horizontal discharge kit is available as a sales accessory.

INSTALLATION NOTES

Pro 27" deep wall hoods are sold as a shell only. An internal, in-line or remote blower is required. For blower recommendations, visit our website, wolfappliance.com.

Pro 27" deep wall ventilation hoods are recommended for use with all Wolf cooking appliances.

Complete installation specifications can be found on our website, wolfappliance.com.

Dimensions in parentheses are in millimeters unless otherwise specified.